



PCT/GB 2003 10/519526
Rec'd PCT/PTO 27 DEC 2004



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 04 DEC 2003


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

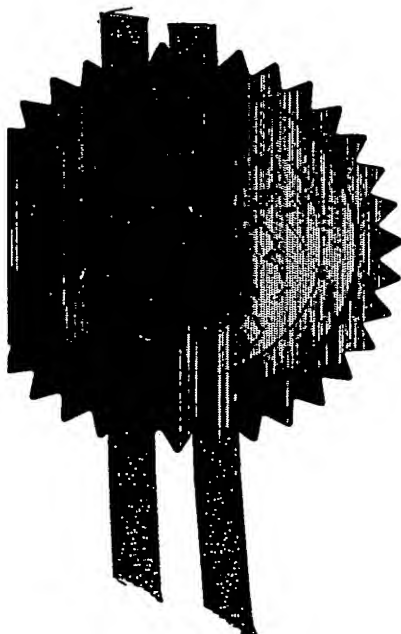

Signed

Swans

Dated 21 November 2003

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)


Patent 1/77
(Rule 16)

The
Patent
Office

28JUN02 17:24:45-1 003402
P017700 0-00-0214961.5

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

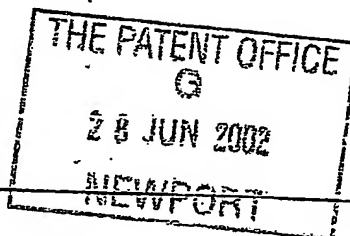

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

2. Patent application number

(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ASHLEY CHRISTOPHER BRYANT

REDWOOD

BERRY HILL

TAPLOW

BUCKINGHAMSHIRE SL6 0DA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

0214961.5

8412652001

4. Title of the invention

DUCTED AIR POWER PLANT

5. Name of your agent (if you have one)

EVAN PRITCHARD

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

10 CHELMSFORD ROAD

SHENFIELD, BRENTWOOD

ESSEX CM15 8RQ

Patents ADP number (if you know it)

1269331001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form 0
Description 10
Claim(s) 0
Abstract 0
Drawings 4 + 4

10. If you are also filing any of the following, state how many against each item.

Priority document
Translations of priority documents
Statement of inventorship and right to grant of a patent (Patents Form 7/77)
Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination
(Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature Evan Pritchard

Date 27.06.02

12. Name and daytime telephone number of person to be contacted in the United Kingdom

E. PRITCHARD

01277 229438

Warning

After an application for a patent has been filed, the Comptroller of Patents will consider whether publication or communication of the invention should be prohibited or restricted under Section 32 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

-1-
DUCTED AIR POWER PLANT

This invention relates to a ducted air power plant. It relates particularly to a power plant for an aircraft which makes use of movable jet nozzles for controlling the aircraft position and attitude. Alternative uses for the power plant include a platform having hovering facilities suitable for carrying equipment such as a camera or fire extinguishing chemicals. An additional possibility is the provision of a freely movable platform for providing aerial observation information.

The principle of using movable jet nozzles in an aircraft to provide initially lift-off and then forward acceleration was disclosed in patent specifications GB861480, GB899862 and GB905651 (Hawker). These specifications describe an arrangement of vectoring nozzles which deflect the engine's thrust so that they will be turned partially downward to provide lift-off. After this stage, the nozzles are rotated to provide forward acceleration and at a sufficiently high speed the necessary lift is obtained entirely from the aircraft wings. The nozzles will then be brought into a fully aft position so that they will be devoted solely to producing the forward movement.

The transition between the nozzles being directed for vertical thrust and then rearward thrust needs to be effected with great care so that the aircraft will be maintained in a generally horizontal attitude throughout. At speeds lower than the wingborne airspeed, the aircraft attitude is sometimes capable of being adjusted by secondary nozzles located at the wingtips, nose and tail which are under the control of a pilot. If side winds are present at take-off, the aircraft attitude will need to be supervised particularly carefully.

The nozzle arrangement disclosed in the aforementioned specifications is the provision of four nozzles, two of which are located in front of the aircraft centre of gravity and two are located behind this point. The nozzles are positioned on the port and starboard

sides of the aircraft so that a relatively stable platform will be formed.

According to the invention, there is provided a ducted air power plant, the power plant comprising a motor driven fan situated in a duct, the fan having an air intake side and in operation providing a high pressure air stream in the duct, and the fan being located adjacent air splitter means, the air splitter means being arranged to divert the airstream into two or more subsidiary streams for delivery to respective jet nozzles of the plant. Preferably, the air splitter means is an air splitter plate arranged to provide four subsidiary air streams.

The delivery of the subsidiary streams from the air splitter plate to the jet nozzles may be effected through respective air feed tubes having a circular cross-section.

The fan rotor may be located adjacent a fan stator blade unit arranged to reduce the degree of rotation present in the air stream leaving the fan. The air splitter plate may be located with one or more air control blades which may be moved to enable the individual flow of air to each jet nozzle to be adjusted.

Preferably, the air control blades are positioned immediately in front of the air splitter plate. Each blade may be balanced for rotation about an axis which is in line with a diagonal of the air splitter plate, such diagonal being located where it will offer minimum obstruction to the air flow through an air flow opening of the plate.

The invention also comprises a platform mounted with the power plant. It further comprises an aircraft including the power plant.

By way of example, a particular embodiment of the invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is an end perspective view of the ducted air power plant,

Figure 2 is a similar view taken from the opposite side of the plant and partly cut away,

Figure 3 shows the power plant engine with front engine casing pieces removed,

Figure 4 depicts an air splitter plate with the ducted fan stator blades,

Figure 5 shows the air splitter plate with air control blades,

Figure 6 shows the air splitter plate,

Figure 7 shows four views of a different embodiment of air splitter plate,

Figure 8 is a perspective view from one end of the air splitter plate showing the air control blades in place,

Figure 9 is a view of the plate from the opposite end showing the air control blades,

Figure 10 is a partial cross-sectional view showing how tilting of an air control blade can divert an air stream from one passage to another of the air splitter plate,

Figure 11 shows the air control blade and servo motor combination in four views taken from different sides,

Figure 12 shows one aircraft construction using the ducted air power plant of the invention, and,

Figure 13 is a plan view of the power plant with the nozzles directed to produce a yaw motion of the unit.

The construction of the ducted air power plant of the invention begins with making a choice of the engine to be used. In the present example, this was a two-stroke internal combustion engine having glow plug ignition and a rotational speed of up to 28,000RPM. The Figures 1 and 2 views show the engine mounted with an axial flow fan rotor carried directly on the output shaft of the engine. In the figures, the engine has a working cylinder 1 and aligned at right angles to this the output shaft 2 is located. The engine is also

provided with an exhaust silencer 3 and the usual working components including a fuel tank with carburettor. The Figure 1 view shows the fan rotor being surrounded by a casing 4 which serves to confine the pressurised air flow produced by the fan. In the Figure 2 view, the casing 4 is shown with a minor modification which provides a slightly bell-shaped opening 5 at the air entry end.

Mounted at the end of the engine output shaft 2 is the fan rotor 7 the blades of which are aligned to drive air in the direction of the cylinder 1. The incoming air stream is divided into four streams by an air splitter plate 8 and these streams are delivered to adjustable nozzles, two of which nozzles 9 can be seen at the left hand side of the Figure 1 view.

The nozzles 9 are located at the ends of air delivery tubes 11 which convey the four air streams from the air splitter plate 8 to the four nozzles 9. The adjustment of the nozzles is effected by rotating each nozzle 9 about the end of its delivery tube 11 so that the nozzle may be turned in order to deflect its respective air stream forwards, downwards or backwards. The rotation of each nozzle is done by operation of a first servo motor 12 alongside the nozzle. There are four of the first servo motors 12, one being provided for each of the nozzles 9.

Figure 3 shows further details of the construction where the front casing 4 pieces have been removed and the nozzles at the left hand side of the engine have been omitted. Just downstream of the fan rotor 7, a fixed blade air straightener comprising fan stator blades 13 is positioned to reduce the amount of rotation which is present in the air stream leaving the fan. The air splitter plate 8 is mounted across the air stream with four passages arranged such that the stream will be divided into the four separate streams for delivery to the nozzles 9 (Figure 1). The shaping of the air splitter plate is such that the incoming air streams will be divided substantially equally into the four smaller streams in a fairly smooth

and streamlined manner. This is effected partly by a funnel-like entry opening 14 being provided at the upstream side of each air splitter passage.

Figure 4 shows the air splitter plate 8 with the ducted fan stator blades 13 mounted on a boss at the front end of the plate 8. Also at the front end of each air splitter passage, the air splitter plate supports an air control blade 16 which is mounted on a surface in front of the passages. There are four air control blades and these are positioned between each pair of passages through which the smaller air streams pass. Therefore, if an air control blade should be positioned in line with the air flow through its pair of passages then there will be an equal flow of air through the two passages. However, if an air control blade should be aligned at a small angle to the direction of air flow, then the air flow through one of the passages will be reduced whilst the flow through the other passage will be increased. There are four air splitter passages with an air control blade located between each pair of passages so this construction allows a wide degree of adjustment to be made to the volume of air passing through the individual passages.

Figure 5 shows the air splitter plate 8 supporting the four air control blades 16. Each air control blade is in contact at its inner end with its surface 17 and the outer end of each blade is movable about an axis radial to the engine output shaft by a second servo motor 18 (Figure 1). The second servo motors 18 are thus supported on the casing 4 pieces which in operation surround the fan assembly.

The air splitter plate 8 also carries the cylindrical boss 19 which is provided with splines so that the fan stator blades 13 will be able to be supported in a rigid manner. The engine output shaft 2 (Figure 2), of course, passes through the air splitter plate 8 so that the fan rotor 7 will be able to be secured to the end of the shaft.

The downstream side of the air splitter plate 8 carries fixing means 21 (Figure 3) by

which the air delivery tubes guiding the four air streams are attached to the plate. As depicted in Figure 1, there are two air delivery tubes 11 located on the left hand side of the engine and two further tubes (not visible in the Figure 1 view) on the right hand side. Each of the air delivery tubes terminates in its own nozzle 9 and the two nozzles visible in the Figure 1 view are shown directed downwards so that they will produce a jet thrust reaction tending to raise the power plant on that side. A similar effect will occur from the nozzles on the opposite side of the power plant. However, each of the nozzles is rotatable about the end of the air delivery tube which supports the nozzle. The positioning of each nozzle is adjusted by the provision of the respective first servo motor 12 for each nozzle. It will thus be possible for all of the nozzles to generate upward thrust if this is required or possibly a combination of forward and upward thrust if the nozzles have been suitably positioned by their servo motors.

Figure 6 shows the air splitter plate 8 after the air control blades 16 have been removed from the surfaces 17.

Figure 7 shows four views of a different embodiment of air splitter plate 8. It will be seen that the two air passages on the upper portion of the plate are spaced apart from one another by a particular distance, whilst the two passages in the lower portion of the plate are spaced closely together. This arrangement allows the air delivery tubes to pass round the mass of the engine.

Figure 8 is a perspective view from one end of the air splitter plate showing the air control blades in place.

Figure 9 is a view from the opposite end of the air splitter plate with the air control blades in place. It will be noticed that the two sets of air control blades 16 whose tilting axis 20 is located on a horizontal line are spaced closer to the upper two air passages than

they are spaced to the lower two passages. This, similarly, allows the air delivery tubes to pass round the mass of the engine.

Figure 10 is a partial cross-sectional view of the air control blade being located between two passages in the air splitter plate 8. There are air passages located at the left hand side and right hand side of the Figure. It is apparent that the tilting of the uppermost air control blade 16 in an anticlockwise direction has caused part of the air stream that would have flowed through the right hand passage to be diverted into the left hand passage. When the air control blade is returned to a position in line with the incoming air stream this will again permit equal volumes of air to pass through both passages.

Figure 11 shows four views of an air control blade 16 with its own second servo motor 18. The servo motor 18 has an output shaft which is connected by a bevel gear drive to its air control blade 16 so that actuation of the motor will cause the control blade to be tilted through a small angle. Each air control blade 16 is seen to have a box-like construction with a rectangular sleeve and a central partition. Each air control blade 16 thus forms two parallel passages for air streams and by tilting this box, the streams will be able to be directed to either side about the axis of the tilting action.

Figure 12 shows one aircraft construction in which the ducted air power plant of the invention has been incorporated. In this instance, the aircraft is a Hawker aircraft as disclosed in one of the aforementioned patent specifications. The aircraft is of a short take off and landing design and it is provided with a forward facing air intake 23, one of these being located on each side of the fuselage. The aircraft also has two forward jet nozzles 24 and the same number of rearward jet nozzles 26. The nozzles are rotatable as already mentioned and, in the arrangement depicted in the Figure, the nozzles have been directed forward and partly downward to give reverse thrust for manoeuvring and braking purposes.

A control system for the power plant was devised which could be mounted in a model aircraft and which was capable of being operated under radio control by a standard commercially available radio transmitter. The aircraft was provided with full operational functions for motor control, rudder, elevators, ailerons, flaps, pitch and roll controls. The aircraft was thus able to hover and to make the transition from hover to forward flight and back again. A gyroscopic stabilisation system was incorporated. The first and second servo motors 12, 18 were driven by a computer controlled system so that the nozzles and the air control blades would be adjustable independently of one another. In fact, the air control blades were arranged to be controlled in pairs so that one set of air control blades will be moved simultaneously with the corresponding set of blades on the opposite side of the engine shaft.

In the construction of the ducted air power plant, it was found possible for many of the components to be made by a plastics injection moulding process in the interest of keeping weight to a minimum. The ducting, the air control blades, engine mountings, the nozzles, the rotor and stator fan units, and the air splitter plate were made by this process. The air control blades 16 each comprise a hollow box-like construction of three parallel surfaces linked by top and bottom members.

In operation of the ducted air power plant, this has been found suitable for incorporation in an aircraft fuselage similar to the Hawker aircraft depicted in Figure 12. With a suitable radio control unit mounted in the aircraft to control the operation of the engine, elevators, flaps and servo motors, this can enable a flying model to be taken through realistic manoeuvres. These can include vertical take-off and landing, transition to forward flight, transition back to hover, landing and flight backwards.

A further useful movement in an aircraft of this type is the yaw motion which is an

angular motion of the aircraft in a horizontal plane about the normally vertical axis. In the Hawker aircraft, a couple to generate the yawing moment is provided by directing a high velocity air stream through bleed valves located in the rear boom of the aircraft fuselage. By contrast, in the aircraft of the present invention, the yaw moment is provided by turning the two left fuselage side nozzles in one direction and the two right nozzles in the opposite direction. The yaw moment is thus delivered through the use of a counter rotated nozzle alignment.



Figure 13 gives a plan view of the power plant with the two left side nozzles 9 (on the upper part of the Figure) rotated in a forward direction and the two right side nozzles 9 (on the lower part of the Figure) rotated in a rearward direction. The thrust will thus be directed to cause the aircraft to rotate in an anticlockwise direction about the vertical axis.

Additionally, when in the hover attitude, as the aircraft moves away from its centre point in either the pitch or roll planes, the nozzles are able to be individually adjusted so that they are always positioned vertically downwards with regard to the ground surface. This provision can help to ensure that the maximum jet thrust is being delivered vertically downwards in order to sustain a stable hover of the aircraft.

The foregoing description of an embodiment of the invention has been given by way of example only and a number of modifications may be made without departing from the scope of the invention as defined in the appended claims. For instance, instead of the power source being a two stroke internal combustion engine, the source may be a brushless electric motor with a motor controller and storage battery. A miniature gas turbine type of engine is a further possibility. In addition, the air control blade component has been described as being of a hollow box construction supporting three parallel air deflector blades. In a different embodiment, the air control blade component could have more or less

than this number of air deflector members.

It is also possible to provide an alternative construction of power plant where the air stream would be delivered down a central duct with movable air control blades being located diagonally opposite one another in the duct. The air control blades would then act to divert part of the stream into one or both of a left or right hand side air feed tube. This construction thus could be used on an aircraft having only three jet nozzles.

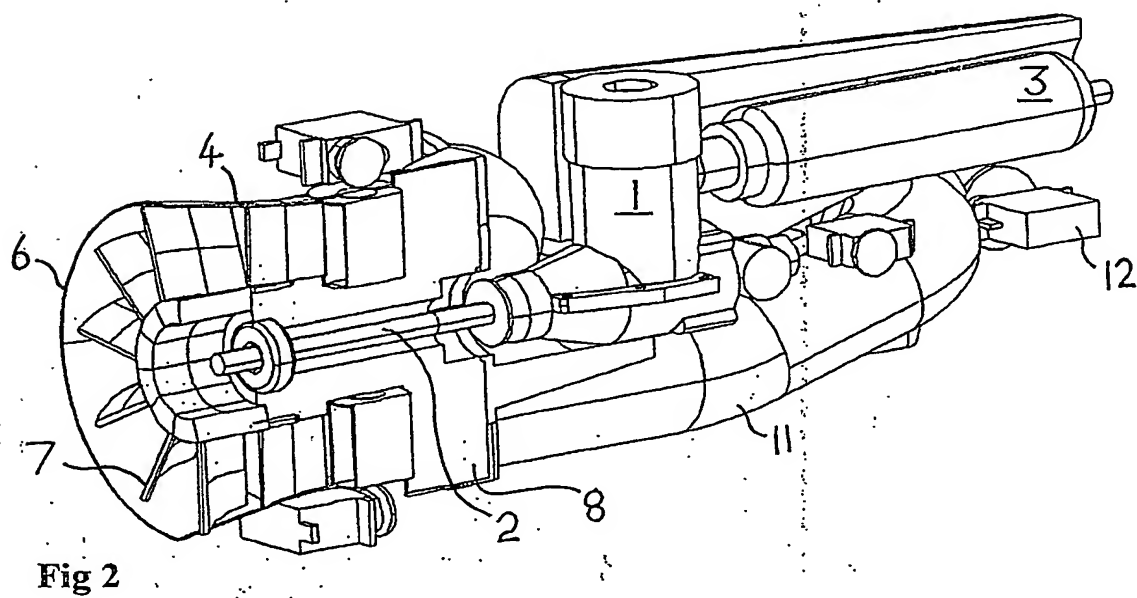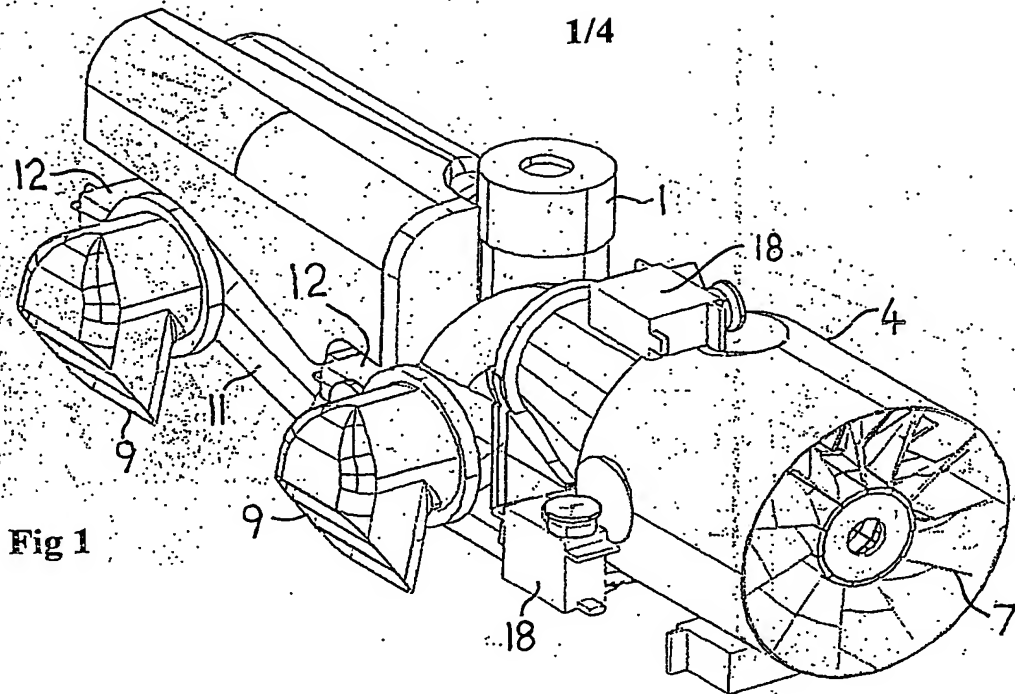

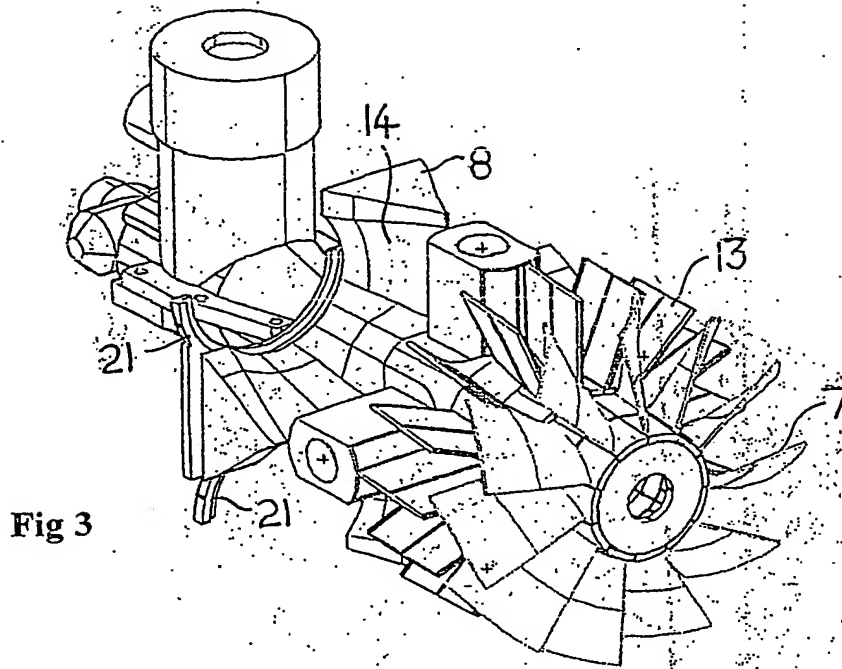


Fig 3

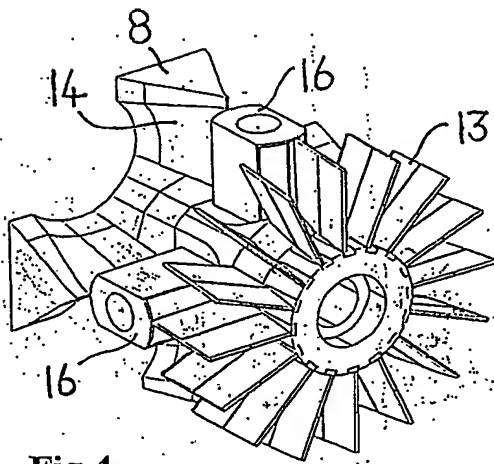


Fig 4

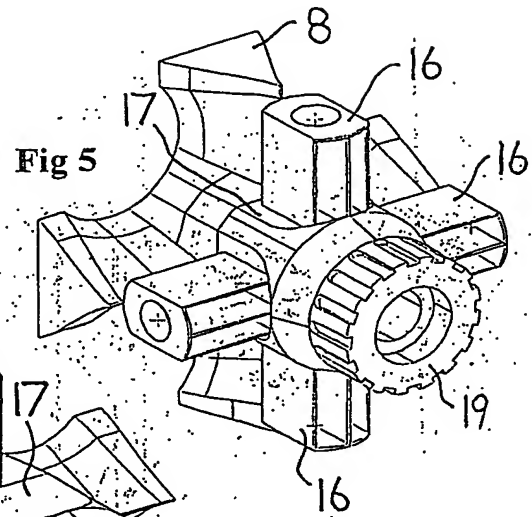


Fig 5

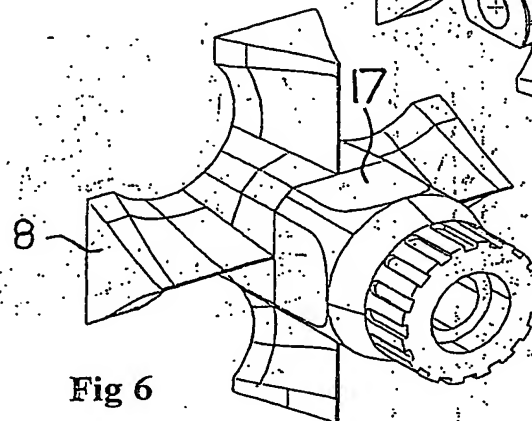


Fig 6

3/4

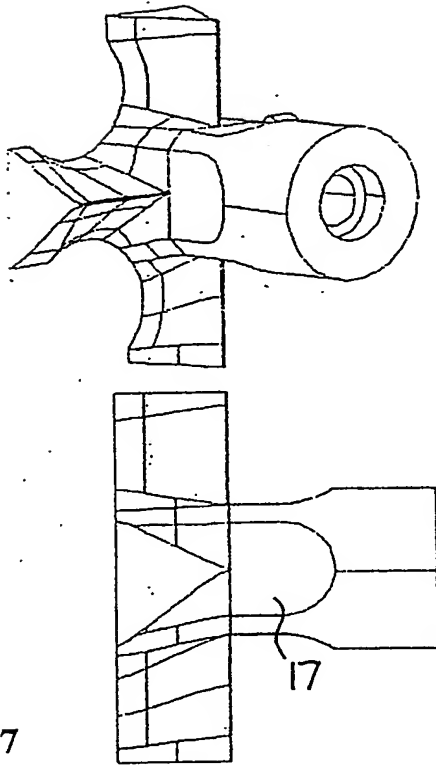


Fig 7

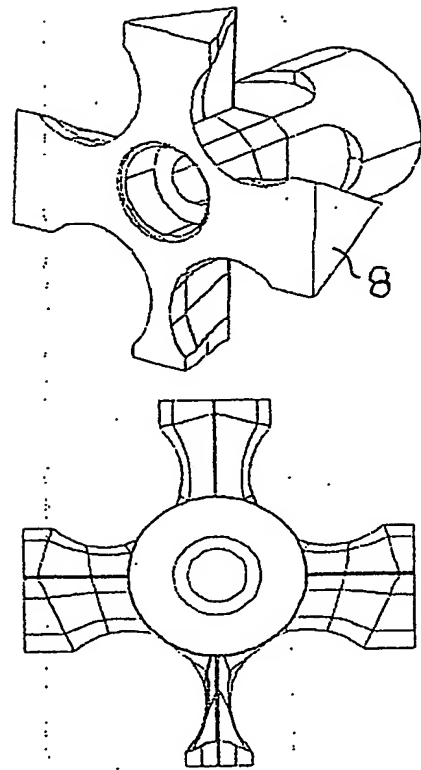


Fig 8

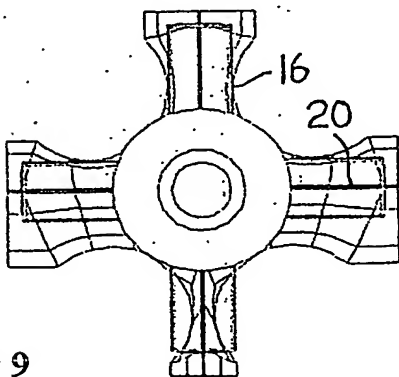


Fig 9

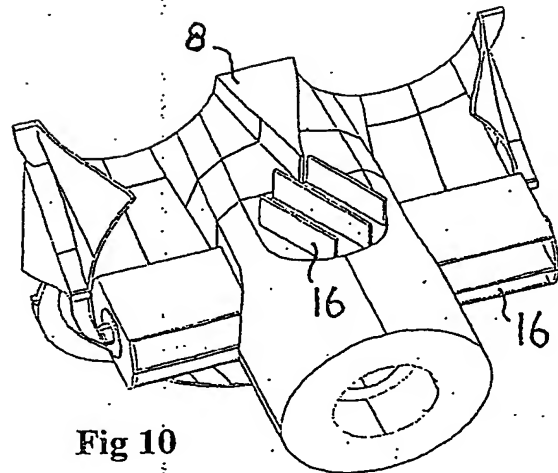


Fig 10

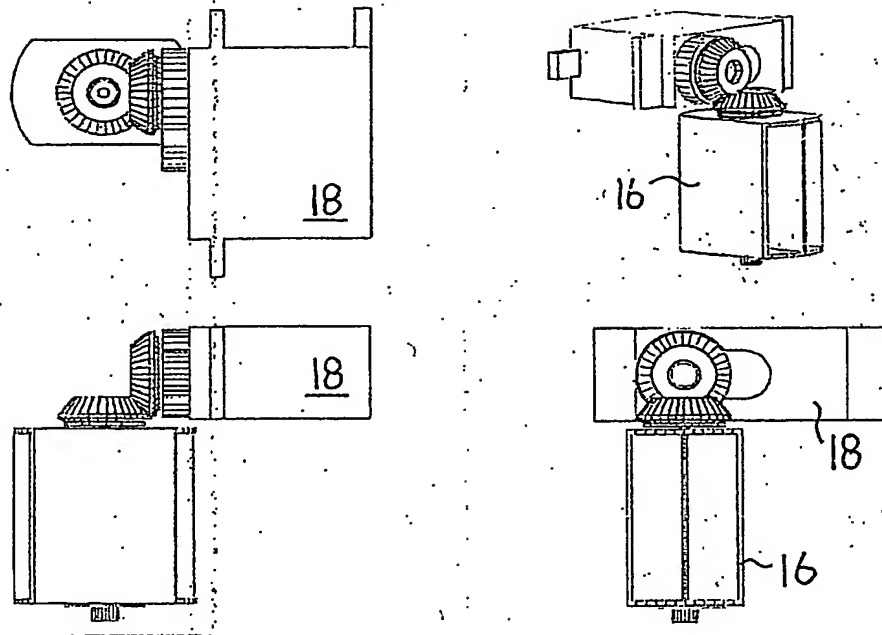


Fig 11

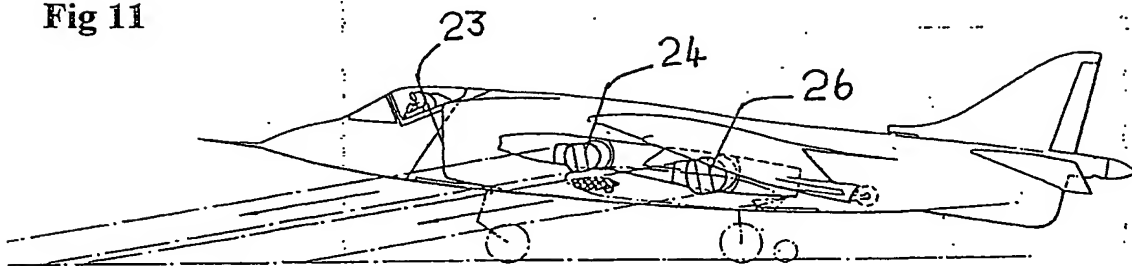


Fig 12

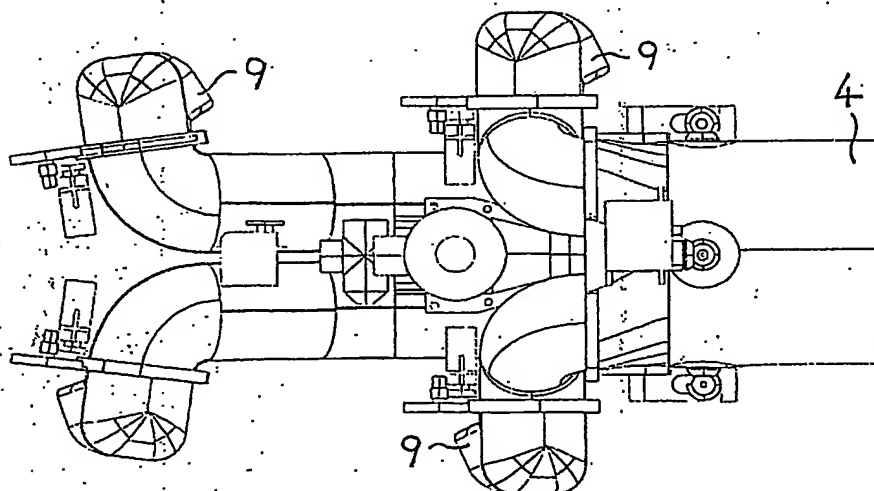


Fig 13

PCT Application

GB0302770

